

Temperature-gradient loading for bridge objects

Test Problem

Name:	Temperature-gradient loading for bridge objects
Description:	This test problem demonstrates CSI Software calculation and application of temperature-gradient loading to bridge objects.
Program:	SAP2000
Version:	14.0.0
Model ID:	97

On this page:

- [Procedure](#)
- [Examples](#)
 - [Example 1: Bridge-modeler model](#)
 - [Example 2: Single frame-element model](#)
- [Attachments](#)

This test problem explains and demonstrates the application of temperature gradient to bridge objects. To summarize the process, temperature gradient is specified and applied to the transformed section, axial force (P) and moment ($M3$) are calculated, then an equivalent temperature distribution (constant + linear) is applied over the depth.

This process enables the correct calculation of overall cross-sectional force and moment. Nodal application of actual temperatures induced by the temperature distribution specified would yield incorrect net force and moment without the cross section being finely discretized.

Procedure

The stress distribution of a temperature gradient is calculated as $E \cdot T$. Users may analytically solve for axial force (P) by integrating this expression over the section, accounting for the web and flange areas. To solve for $M3$, integrate the moment of stresses about the neutral axis. CSI Software derives temperature-gradient response by following these formulations. First, the software assumes a linear gradient with two unknowns, including neutral-axis value and gradient slope. Integration procedures yield a set of polynomial expression for P and $M3$. Simultaneous solution then yields exact expressions for axial force and moment.

Examples

The following two examples demonstrate temperature-gradient application. Screenshots and attached hand calculations illustrate the procedure.

Example 1: Bridge-modeler model

Please note that the [hand calculations](#) attached provide additional details.

A single-span concrete-box bridge, fixed at both abutments, is created using the [bridge modeler](#). The [linked](#) bridge object is updated as a [solid](#) model. Loading from temperature gradient is defined as shown in Figure 1:

SAP2000 v14.0.0 Advanced - Temperature gradient - bridge object V14.0.0

Bridge Temperature Gradient Data

Temperature Gradient Name

Units

Temperature Gradient Type

☐ AASHTO Default
Zone
Negative Temperature Multiplier

☐ Chinese JTG D60 Default
Overlay Type
Asphalt Thickness
Negative Temperature Multiplier
Use 0.7 Concrete-Masonry Arch Factor

☒ User
Type

Temperature Difference Data

Number of Specified Distances
This Distance May Vary
Include These Temperature Difference Values

d1	3.937	T1 Positive	32.4	T1 Negative	0
d2	11.811	T2 Positive	10.8	T2 Negative	0
d3	May Vary	T3 Positive	0.	T3 Negative	0
d4	5.9055	T4 Positive	0.	T4 Negative	0
		T5 Positive	5.4	T5 Negative	0

OK

Cancel

General User - 4 Specified Distances

Figure 1 - Temperature-gradient loading

As mentioned earlier, an equivalent *constant + linear* temperature gradient generates the temperature load for a solid model. This procedure correlates precisely with the attached [hand calculations](#) , as shown in Figure 2:

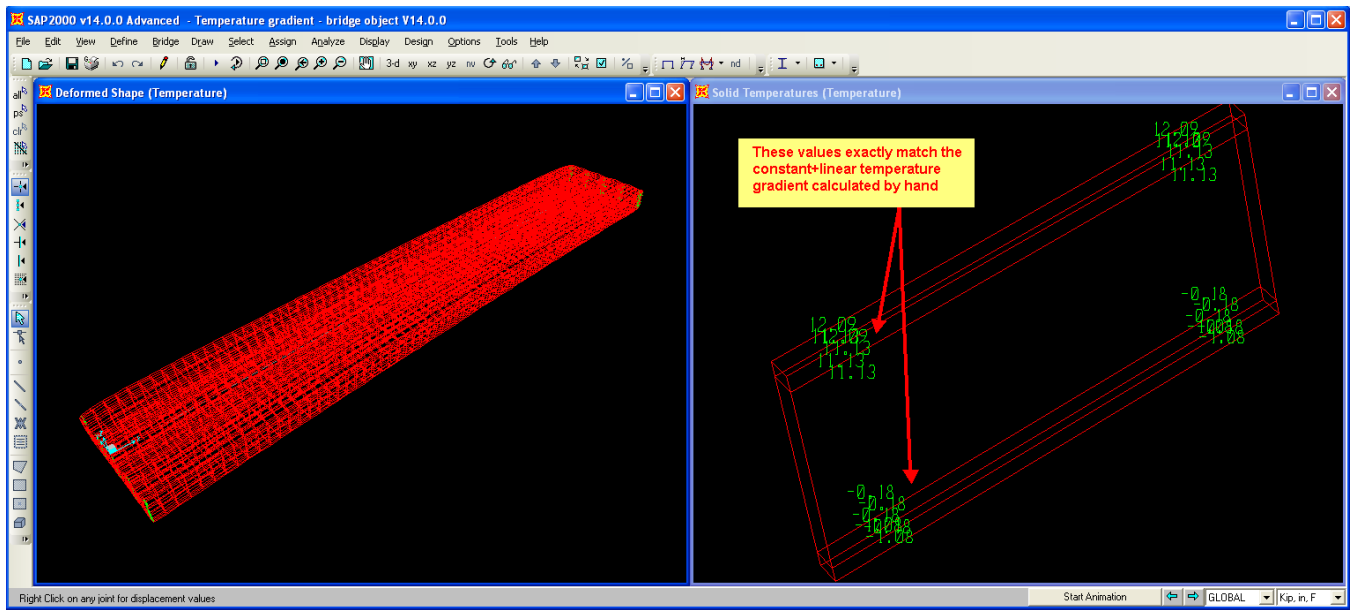


Figure 2 - Temperature-gradient loading on solid elements

For bridge response, loading from the temperature gradient induces a moment of 2568 kip-ft, which closely correlates with the [hand calculated](#) moment of 2669 kip-ft. Software output is shown in Figure 3:

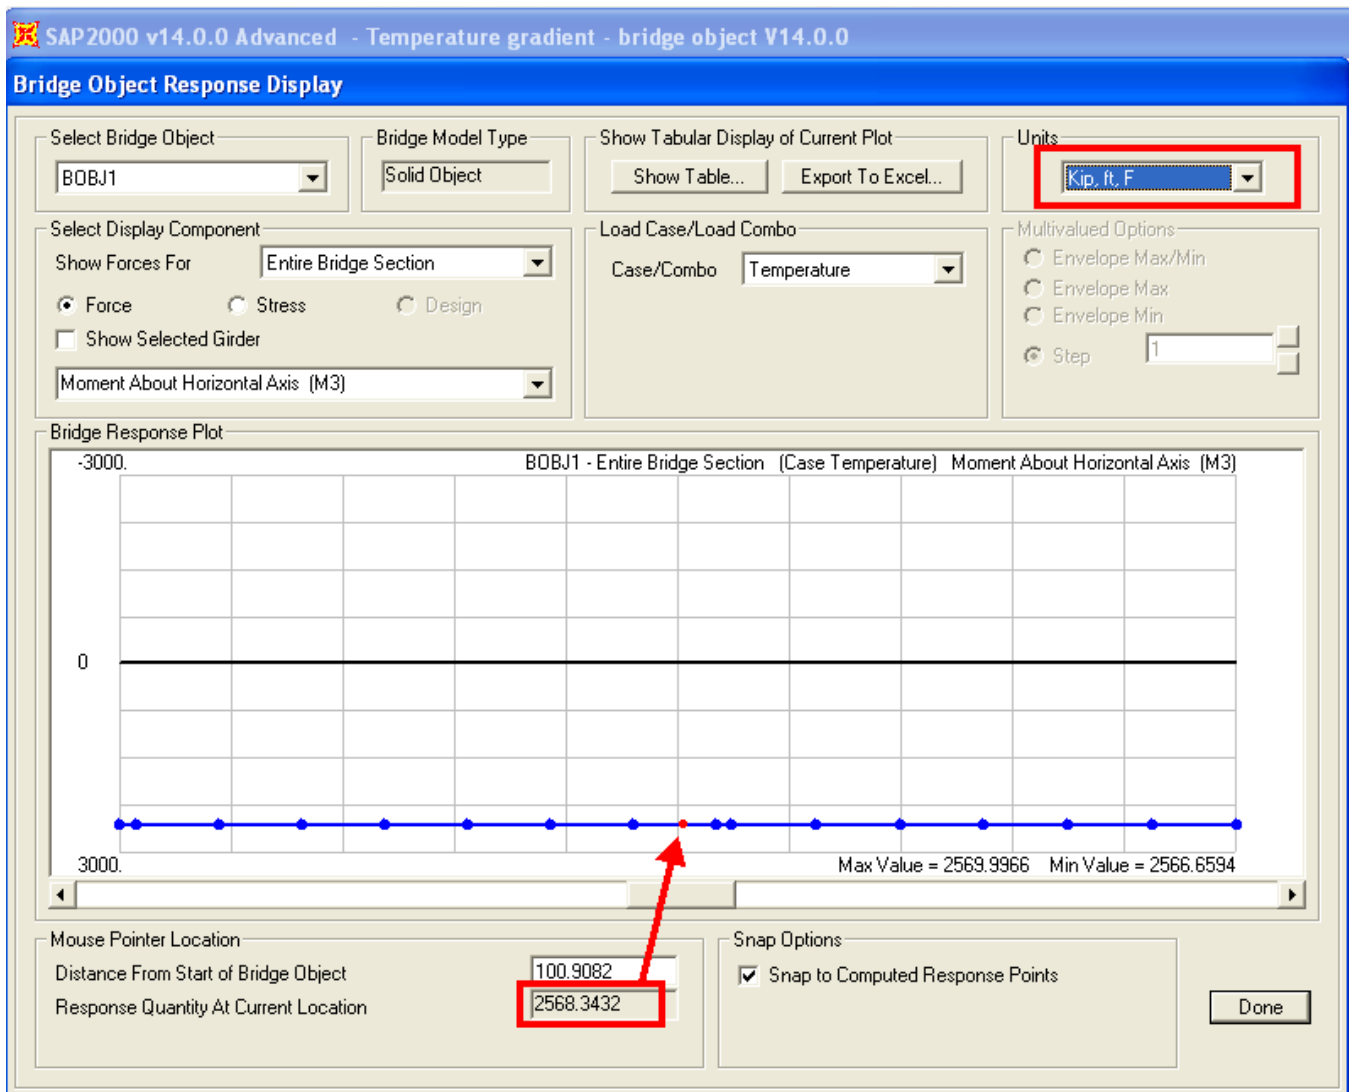


Figure 3 - Moment induced by temperature gradient

Example 2: Single frame-element model

Please note that the [hand calculations](#) attached provide additional details.

For example 2, a single, beam frame element is fixed at both ends and manually loaded with the *constant + linear* temperature gradient. Element cross section is defined to match those properties of the entire bridge deck section from example 1. The temperature-gradient loading creates a moment of 2668 kip-ft, nearly identical to the hand-calculated moment of 2669 kip-ft. Software output is shown in Figure 4:

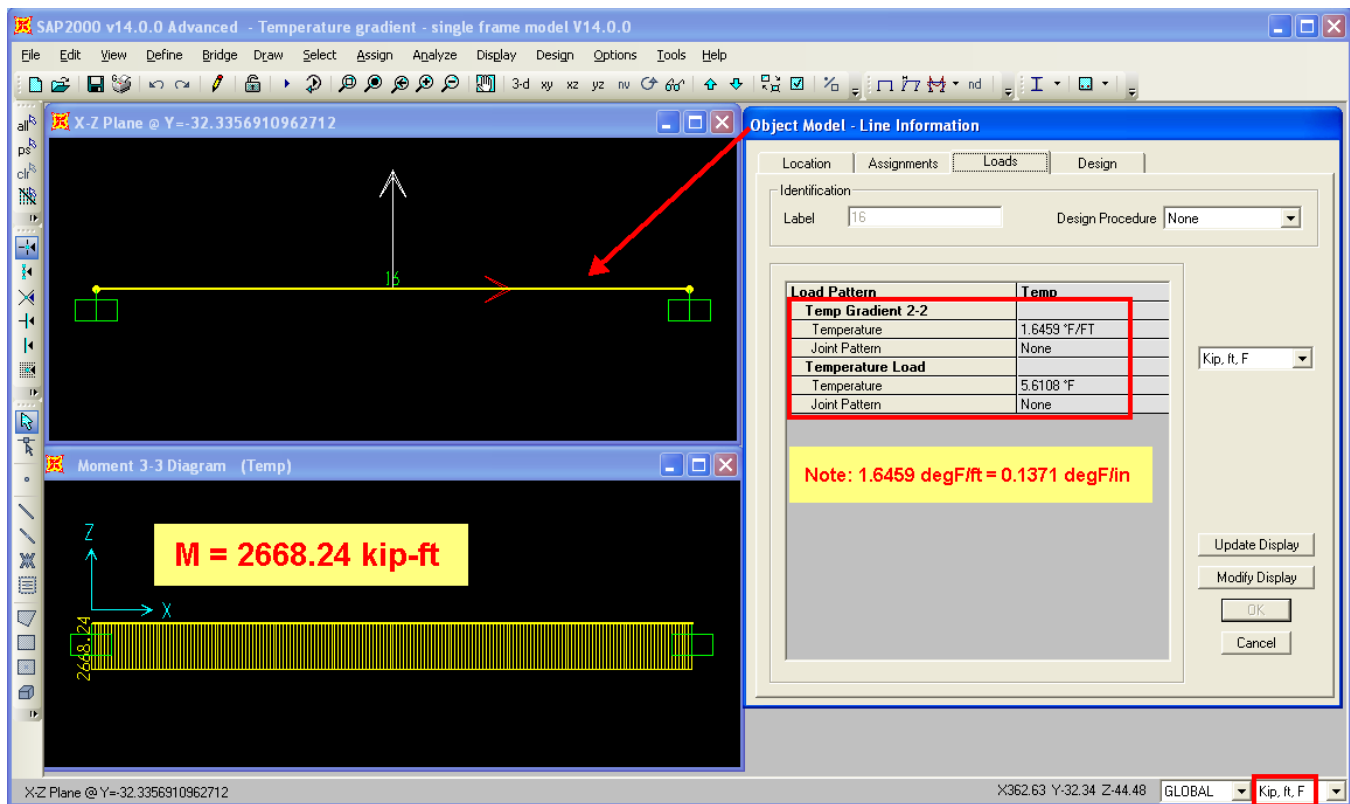


Figure 4 - Temperature-gradient on the frame-element model

Attachments

- [SAP2000 V14.0.0 models](#) (zipped .SDB files) – Example 1: Bridge-modeler model, Example 2: Single frame-element model
- [Hand calculations](#) (PDF)